

## SPRITZE

A Trusted IDEX
Fire & Safety Brand





OUR VISION IS TO BUILD THE BEST JET PIPE. 20 YEARS AFTER THE INTRODUCTION OF THE AWG TURBO-SPRITZE, WE ARE ABOUT TO TAKE THE HOLLOW JET PIPE TO A NEW LEVEL OF DEVELOPMENT.

THE AWG TURBO-SPRITZE EVO COMBINES OUR JOINT APPLICATION EXPERIENCES OF MORE THAN 20 YEARS WITH THE LATEST ERGONOMIC RESEARCH AND HIGH-QUALITY MATERIALS TO CREATE THE ULTIMATE HOLLOW JET PIPE FOR FIREFIGHTING. WITH THE AWG TURBO-SPRITZE EVO, WE ARE REDEFINING THE STANDARD FOR HOLLOW JET PIPES.

THE BEST TURBO-SPRITZE WE HAVE EVER BUILT.





#### DISTINCTIVE DESIGN. OUTSTANDING ERGONOMICS.

The new design was developed with extensive user feedback and evaluated and optimised with male and female, small and large hands.

The result is a highly improved grip even in wet conditions, a distinct feel thanks to larger pointers and pre-shaped recessed grips on the guard ring, better visibility of settings and secure handling across all sizes.



#### From firefighters for firefighters

"For us, the focus was on further optimising the product ergonomically for use in the most difficult conditions, as well as creating a furtheroriented design for the AWG brand that embodies maximum performance and agility."


Tobias Neuber
Head of Industrial Design Team
BUSSE Design+Engineering

Florian Lipp Industrial Designer





### YOU CAN LITERALLY GRASP THE ADVANTAGES IN YOUR HANDS!

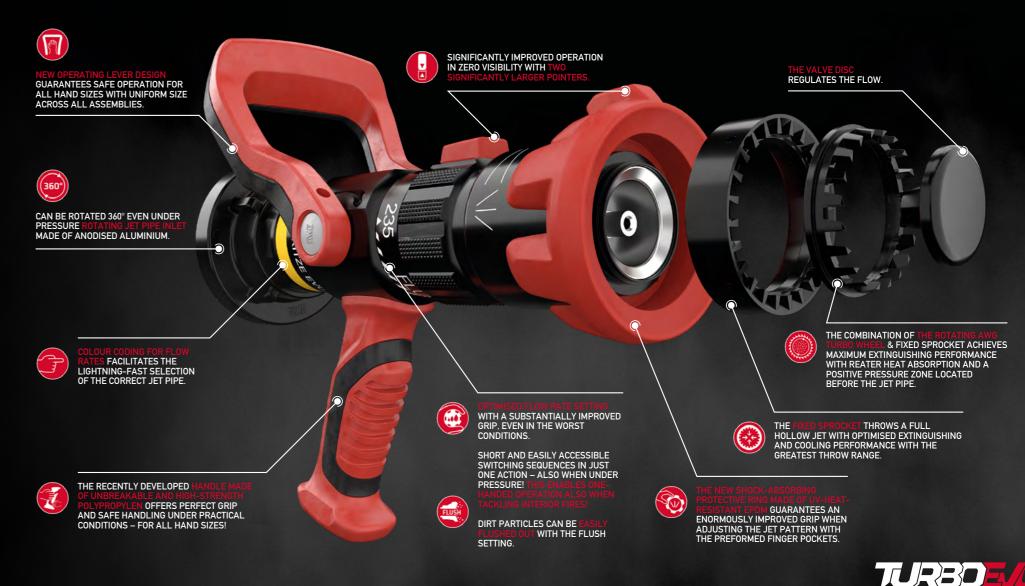



#### UNIQUE PERFORMANCE.







An outstanding feature of the jet pipes is the jet pipe head that has been specifically developed for every model of the AWG turbo nozzles EVO, with the combination of the turbo wheel and the fixed sprocket – and therefore the performance of the jet spray.

Various reflectors form the filled full cone spray jet that can only be realised with the AWG Turbo-Spritze range and guarantee perfect jet quality, maximum extinguishing effect with high throwing distance and the highly effective AWG spray pattern with positive pressure zone in front of the nozzle.

- Model-specific optimised jet pipe heads
- Full cone spray due to the combination of AWG turbo wheel and fixed sprocket
- Perfect jet quality
- Maximum extinguishing performance
- Positive pressure zone located before the turbo nozzle
- Rinsing position for effective cleaning
- Replaceable turbo wheel and sprocket





#### DESIGNED FOR A FIREFIGHTERS LIFE.



The heart of the Turbo-Spritze EVO, the housing and the water-carrying parts are made of high-quality aluminium alloys, which are anodised for even better protection against mechanical stress as well as weathering and corrosion.

The optimised design of the ball valve impresses with less friction loss and thus easier opening and closing. The precision shut-off ball of the valve is also made of a durable, anodised aluminium alloy – not plastic! – and is wear-free. Large diameters prevent clogging by dirt particles.

- High-quality anodised aluminium alloy housing
- Handle made of unbreakable and high-strength PP
- Operating lever made of unbreakable aluminium alloy
- Shock-absorbing protective ring made of UV-heat-resistant EPDM
- Replaceable turbo wheel and sprocket
- Optimised ball valve made of durable, anodised aluminium – not plastic!
- Less friction loss
- Easier opening and closing
- Large diameters prevent clogging



#### MADE FOR YOUR HANDS.





The colour coding of the flow rates with clip on the rotatable for 360° inlet coupling, makes it possible to select the right nozzle in the vehicle at a glance. The colour code is based on the colour coding of the foam fittings. This means that the perfect combination of inductor and Turbo-Spritze EVO for foam attack can be selected at once.





- Light and compact
- Optimal for use with rapid intervention equipment with dimensionally stable pressure hose
- Inlet Storz 52 (C)
- 40 / 80 / 130 l/min at 6 bar
- DIN 15182-3
- Clip RAL 9006



TURBOE 235

- UniversalEfficient firefighting when tackling interior fires
- Optimal for smoke and room cooling
- Inlet Storz 52 (C)
- Turbo wheel
- 60 / 130 / 235 l/min at 6 bar
- DIN 15182-3
- Clip RAL 1018





- Universal
- Efficient firefighting when tackling interior fires
- Optimal for smoke and room cooling
- Inlet Storz 52 (C)
  Inlet Storz 75 (B)
- Turbo wheel
- 130 / 235 / 400 l/min at 6 bar
- **DIN 15182-3**
- Clip RAL 3000





- Designed for tackling or containing exterior fires
- High flow rates 360 / 550 / 750 l/min at 6 bar
- Inlet Storz 75 (B)
- **DIN 15182-3**
- Clip RAL 5017





- Designed for tackling or containing exterior fires
- High flow rates 550 / 750 / 950 l/min bei 6 bar
- Eingang Storz 75 (B)
- **DIN 15182-3**
- Clip RAL 6024







# AWG SPRITZE

With the AWG turbo nozzle EVO, we are creating the product that will remain the standard equipment for volunteer fire brigades, professional fire brigades and plant fire brigades in the German-speaking countries for the next 20 years.

Come with us on this journey.

VISION. ERGONOMICS. PERFORMANCE.



